

FIG. 9

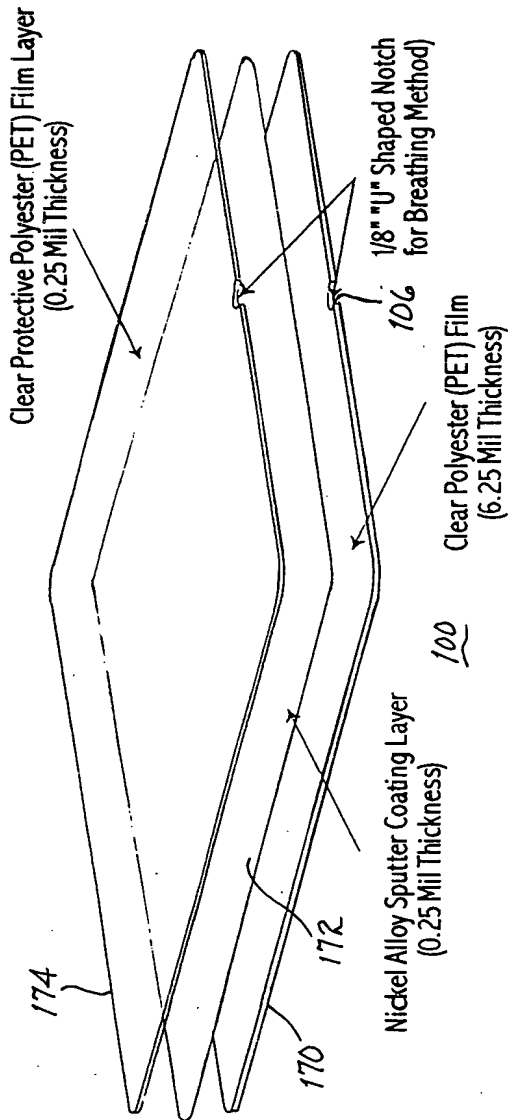


Fig. 13

ENERGY STAR Qualification Criteria		
Windows and Doors		
Zone	U-factor	SHGC
Northern	.35 or less	Any
North/Central	.40 or less	.55 or less
South/Central	.40 or less	.40 or less
Southern	.65 or less	.40 or less

Fig. 15

Ultra Low-E Acrylic Block vs. Standard Acrylic Block and Glass Block

	Ultra Low-E Acrylic Block 8" Block - 2 1/4" Thick (Assembled in a Vinyl Frame)	Standard Acrylic Block 8" Block - 2 1/4" Thick (Assembled in a Vinyl Frame)	Glass Block 8" Block - 2" Thick (Assembled in a Vinyl Frame)
U-Factor	0.35	0.50	0.53
S.H.G.C.	0.39	0.59	0.60

Fig. 14